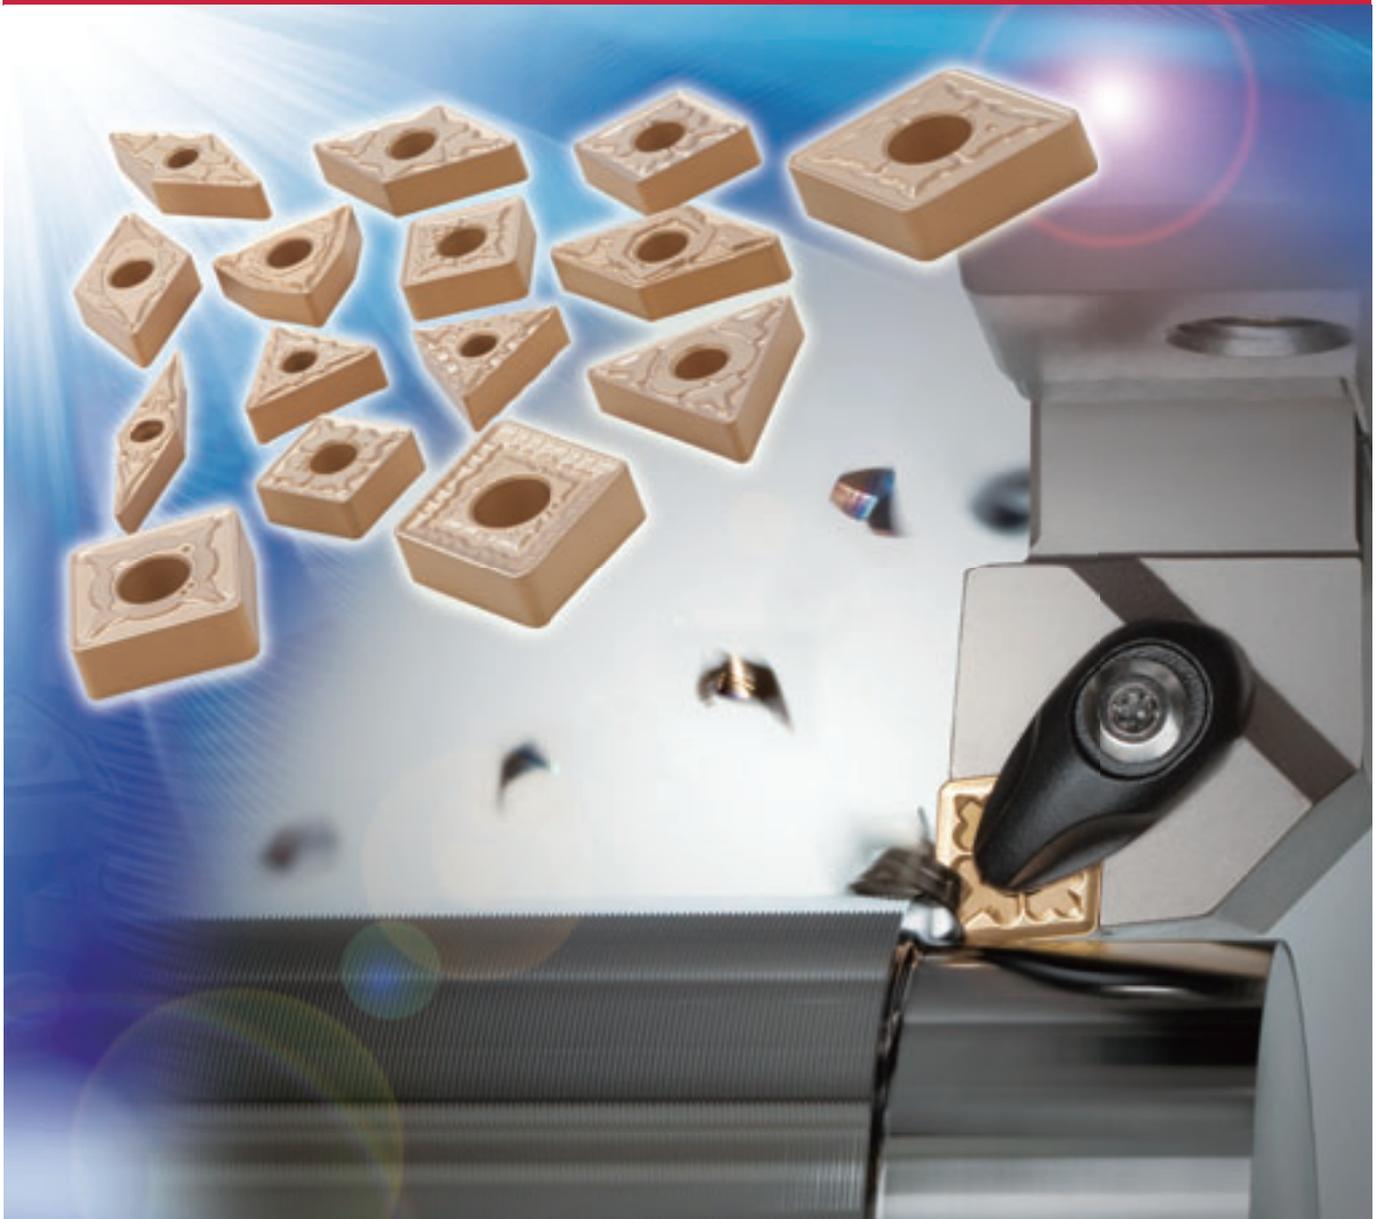


# **TURNLINE** CVD coated grade for steel turning **T9100 SERIES**

**New Line of  
chipbreakers for  
Medium to Heavy  
cutting**

**PREMIUMTEC**  
TUNGALOY

**Extremely stable tool life due to amazing chipping resistance**



# ***Extremely Stable Tool***

***New Triple Technology !***

***Provides a high level of reliability  
with its excellent fracture resistance!***

## Features

### ● Special Surface Technology

**PREMIUMTEC**  
TUNGALOY

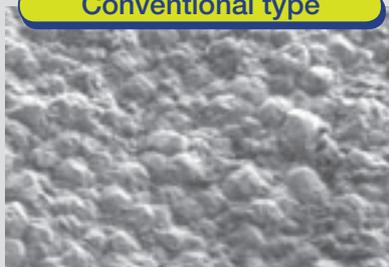
*Smooth insert surface prevents chip  
adhesion and improves chip flow.*

#### ■ Comparison of coated surfaces

**T9100 SERIES**



Conventional type



### ● Adhesion Reinforcement Technology

*This specialised treatment enhances the bond  
between the coating and the substrate.*

# Life !



## Columnar Stabilization Technology

**T9100 SERIES**

Crystal structure  
Substrate

Stress

Disperses the stress

*Prevents randomly developed cracks !!*

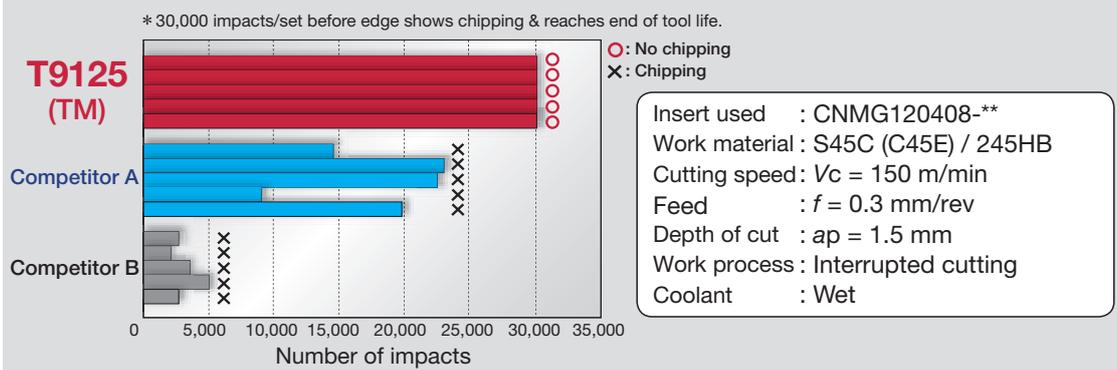
**Excellent fracture resistance & extended tool life!**

**Conventional**

Chipping

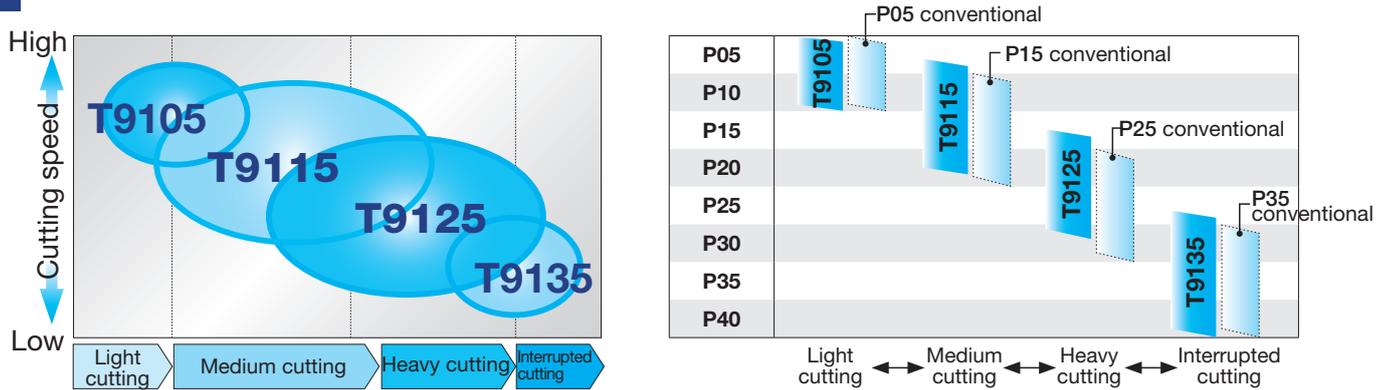
Growing cracks leads to the peeling off the coating

### T9125 chipping or fracture resistance



**Result** *Even under heavy interrupted cutting, the tool life of the T9125 is extremely stable.*

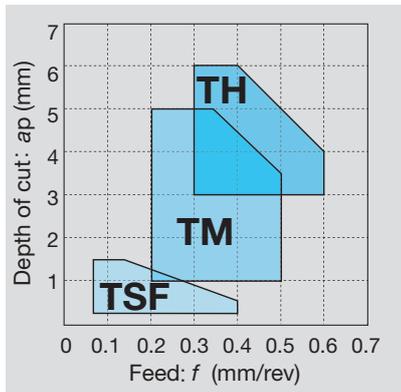
## Grades



Application	Grade	Substrate			Coating layer		Features
	Application code	Specific gravity	HRA	GPa	Main Composition	Thickness (μm)	
P Steel	<b>T9105</b>	14.2	91.5	2.4	Continuously formed columnar crystal TiCN + Al <sub>2</sub> O <sub>3</sub>	16	<b>Highly stable grade for steel turning</b> <i>Special Surface Technology</i> <b>PREMIUMTEC</b> T9105 shows excellent performance during high speed cutting. T9115 demonstrates a good balance of wear and impact resistance. Applicable for continuous to light interrupted cutting. T9125 demonstrates excellent chipping resistance. Applicable for medium to heavy cutting. T9135 shows excellent impact resistance during heavy interrupted cutting.
	P01 - P10						
	<b>T9115</b>	13.9	91.0	2.5			
	P10 - P20						
	<b>T9125</b>	13.7	90.0	2.6			
	P20 - P30						
<b>T9135</b>	13.5	89.0	2.6				
P30 - P40							

## Chipbreaker (For negative type inserts)

### Basic chipbreakers

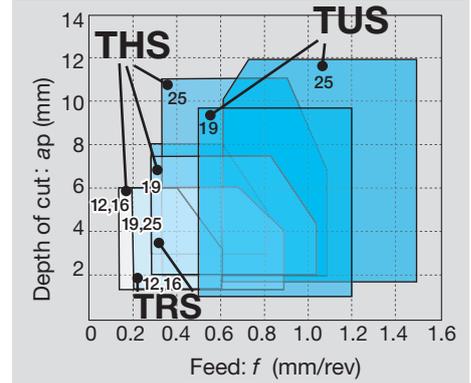
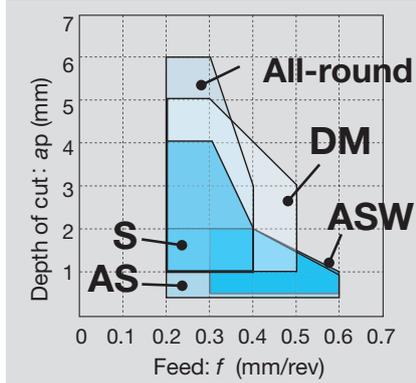
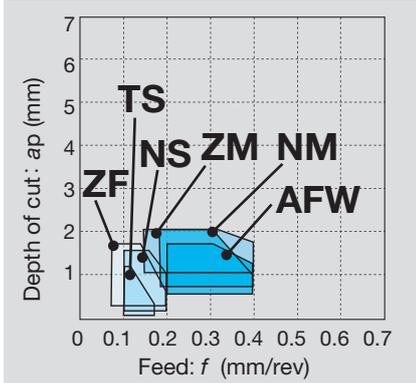


Application	Chipbreaker	Shape		Features
Finishing	<b>TSF</b>			First choice chipbreaker for finishing steels. The dimple structure decreases the contact area between the insert surface and chips, resulting in significant reduction of heat occurrence.
Medium cutting	<b>TM</b>			General-purpose, low cutting force chipbreaker provided with a wide range of chip control area, featuring the unique protrusion adjacent to the corner and cutting sharpness due to the high-rake angle.
Medium to heavy cutting	<b>TH</b>			Double-sided, three-dimensional chipbreaker provided with tougher cutting edges and smooth chip breakability. Also excels in high-feed machining.

### Standard cutting conditions

Application	Machining mode	Chipbreaker	Grades	Cutting speed Vc (m/min)	Depth of cut ap (mm)	Feed f (mm/rev)
Finishing	Continuous	<b>TSF</b>	<b>T9105</b>	180 - 350	0.2 - 1.5	0.08 - 0.4
	Continuous to Light interrupted		<b>T9115</b>	100 - 300		
	Light interrupted		<b>T9125</b>	80 - 180		
	Heavy interrupted		<b>T9135</b>	50 - 150		
Medium cutting	Continuous	<b>TM</b>	<b>T9105</b>	180 - 350	1.0 - 5.0	0.2 - 0.5
	Continuous to Light interrupted		<b>T9115</b>	100 - 300		
	Light interrupted		<b>T9125</b>	80 - 180		
	Heavy interrupted		<b>T9135</b>	50 - 150		
Medium to heavy cutting	Continuous	<b>TH</b>	<b>T9105</b>	180 - 350	3.0 - 6.0	0.3-0.6
	Continuous to Light interrupted		<b>T9115</b>	100 - 300		
	Light interrupted		<b>T9125</b>	80 - 180		
	Heavy interrupted		<b>T9135</b>	50 - 150		

## Complementary chipbreakers

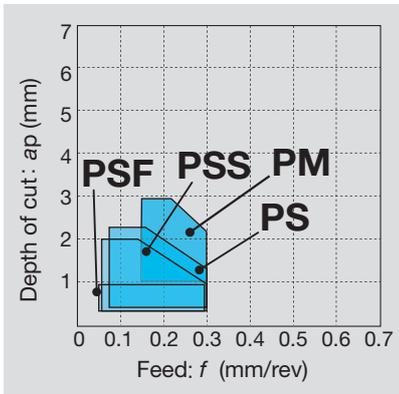


Application	Chipbreaker	Shape	Features
Finishing	ZF		Suitable for temporary increases in depth of cut such as on flange sections. Excels in chip control and is best for machining of lead free steels.
	NS		The finishing chipbreaker has remarkable chip control under low feed and small depth of cut conditions. Suitable for machining near net shape components.
	TS		Ideal chipbreaker for finishing under a wide range of cutting conditions. Sharp cutting edge allows excellent chip control in the machining of shaft like components.
	AFW		Features positive land and excellent chip control. Applicable for small depth of cut and high-feed cutting. Provided with wiping function.
High feed, small depth of cut	AS		Advanced chipbreaker that is suitable for turning at high feeds and small depths of cut. Applicable for the machining of forged components with high productivity.
	ASW		Negative land design contributes to high reliability and edge strength. Applicable for small depth of cut and high-feed cutting. Provided with wiping function.
Finishing to medium cutting	NM		NM chipbreaker has a well designed protrusion and a strong edge for increased feed rates. It is suitable for highly productive turning of forged steel.
	ZM		Superior chip control in profiling and machining rounded forms. Ideally suited for machining lead free steels.
Medium cutting	All-round		Highly reliable chipbreaker for medium cutting under a wide range of conditions from continuous to interrupted cutting.
	DM		Enhanced chipbreaker with exceptional fracture resistance that provides excellent chip control under a wide range of medium cutting conditions.
	S		Sharp cutting edge and simply designed chipbreaker offer exceptional chip control and high productivity in medium cutting applications.
Medium to heavy cutting	<b>New</b> THS		Optimum chipbreaker that is suitable for machining with a fluctuating depth of cut in medium to heavy turning. Optimized cutting edge provides high strength and low cutting forces.
Medium to heavy cutting (Single sided)	<b>New</b> TRS		Single sided chipbreaker delivers exceptional chip control when medium to heavy cutting. Small protrusions near the cutting edge decrease contact with the chips.
Heavy cutting (Single sided)	<b>New</b> TUS		Single sided chipbreaker that has uniquely designed protrusions for outstanding chip control when machining large depths of cut. Optimum cutting edge design increases fracture resistance.

## Standard cutting conditions

Application	Machining mode	Chipbreaker	Grades	Cutting speed Vc (m/min)	Depth of cut ap (mm)	Feed f (mm/rev)	
Finishing	Continuous	<b>ZF</b>	<b>T9105</b>	180 - 350	0.2 - 1.5	0.07 - 0.2	
	Continuous to Light interrupted		<b>T9115</b>	100 - 300			
	Light interrupted		<b>T9125</b>	80 - 180			
	Heavy interrupted		<b>T9135</b>	50 - 150			
	Continuous	<b>NS</b>	<b>T9105</b>	180 - 350	0.2-1.5	0.07 - 0.25	
	Continuous to Light interrupted		<b>T9115</b>	100 - 300			
	Light interrupted		<b>T9125</b>	80 - 180			
	Heavy interrupted		<b>T9135</b>	50 - 150			
		Continuous	<b>TS</b>	<b>T9105</b>	180 - 350	0.2 - 1.5	0.08 - 0.2
		Continuous to Light interrupted		<b>T9115</b>	100 - 300		
		Light interrupted		<b>T9125</b>	80 - 180		
		Heavy interrupted		<b>T9135</b>	50 - 150		
		Continuous	<b>AFW</b>	<b>T9105</b>	180 - 350	0.5 - 1.5	0.2 - 0.4
		Continuous to Light interrupted		<b>T9115</b>	100 - 300		
		Light interrupted		<b>T9125</b>	80 - 180		
		Heavy interrupted		<b>T9135</b>	50 - 150		
High feed, small depth of cut	Continuous	<b>AS</b>	<b>T9105</b>	180 - 350	0.5 - 2.0	0.2 - 0.6	
	Continuous to Light interrupted		<b>T9115</b>	100 - 300			
	Light interrupted		<b>T9125</b>	80 - 180			
	Heavy interrupted		<b>T9135</b>	50 - 150			
	Continuous	<b>ASW</b>	<b>T9105</b>	180 - 350	0.5 - 2.0	0.3 - 0.6	
	Continuous to Light interrupted		<b>T9115</b>	100 - 300			
	Light interrupted		<b>T9125</b>	80 - 180			
	Heavy interrupted		<b>T9135</b>	50 - 150			
Finishing to medium cutting	Continuous	<b>NM</b>	<b>T9105</b>	180 - 350	0.5 - 2.0	0.15 - 0.4	
	Continuous to Light interrupted		<b>T9115</b>	100 - 300			
	Light interrupted		<b>T9125</b>	80 - 180			
	Heavy interrupted		<b>T9135</b>	50 - 150			
	Continuous	<b>ZM</b>	<b>T9105</b>	180 - 350	0.7 - 2.0	0.2 - 0.4	
	Continuous to Light interrupted		<b>T9115</b>	100 - 300			
	Light interrupted		<b>T9125</b>	80 - 180			
	Heavy interrupted		<b>T9135</b>	50 - 150			
Medium cutting	Continuous	<b>All-round</b>	<b>T9105</b>	180 - 350	1.0 - 6.0	0.2 - 0.4	
	Continuous to Light interrupted		<b>T9115</b>	100 - 300			
	Light interrupted		<b>T9125</b>	80 - 180			
	Heavy interrupted		<b>T9135</b>	50 - 150			
	Continuous	<b>DM</b>	<b>T9105</b>	180 - 350	1.0 - 5.0	0.2 - 0.5	
	Continuous to Light interrupted		<b>T9115</b>	100 - 300			
	Light interrupted		<b>T9125</b>	80 - 180			
	Heavy interrupted		<b>T9135</b>	50 - 150			
	Continuous	<b>S</b>	<b>T9105</b>	180 - 350	1.0 - 4.0	0.2 - 0.4	
	Continuous to Light interrupted		<b>T9115</b>	100 - 300			
	Light interrupted		<b>T9125</b>	80 - 180			
	Heavy interrupted		<b>T9135</b>	50 - 150			
Heavy cutting	Continuous	<b>THS</b>	<b>T9105</b>	180 - 350	1.5 - 11.0	0.3 - 1.0	
	Continuous to Light interrupted		<b>T9115</b>	100 - 300			
	Light interrupted		<b>T9125</b>	80 - 180			
	Heavy interrupted		<b>T9135</b>	50 - 150			
Medium to heavy cutting (Single sided)	Continuous	<b>TRS</b>	<b>T9105</b>	180 - 350	1.0 - 8.0	0.2 - 0.8	
	Continuous to Light interrupted		<b>T9115</b>	100 - 300			
	Light interrupted		<b>T9125</b>	80 - 180			
	Heavy interrupted		<b>T9135</b>	50 - 150			
Heavy cutting (Single sided)	Continuous	<b>TUS</b>	<b>T9105</b>	180 - 350	1.0 - 12.0	0.5 - 1.5	
	Continuous to Light interrupted		<b>T9115</b>	100 - 300			
	Light interrupted		<b>T9125</b>	80 - 180			
	Heavy interrupted		<b>T9135</b>	50 - 150			

## Chipbreaker (For positive type inserts)



Application	Chipbreaker	Shape		Features
Finishing	<b>PSF</b>			First choice chipbreaker for finishing with low cutting force and high wear resistance. The PSF has excellent chip control at a low depth of cut and reduces chip control problems.
Finishing to light cutting	<b>PSS</b>			The PSS chipbreaker is suitable for finishing to light cutting in stainless steel and internal turning. It has excellent chip control with low cutting forces.
Finishing to medium cutting	<b>PS</b>			This three-dimensional, finishing chipbreaker features excellent chip control and a sharp cutting action. The economical "M" class insert is applicable for a wide range of applications, delivering highly efficient boring.
Medium cutting	<b>PM</b>			Basic chipbreaker for medium cutting. This features excellent cutting sharpness and chip control.

### Standard cutting conditions

Application	Machining mode	Chipbreaker	Grades	Cutting speed $V_c$ (m/min)	Depth of cut $a_p$ (mm)	Feed $f$ (mm/rev)
Finishing	Continuous to light interrupted	<b>PSF</b>	<b>T9115</b>	100 - 300	0.1 - 0.5	0.08 - 0.3
	Light interrupted		<b>T9125</b>	80 - 180		
Finishing to light cutting	Continuous to light interrupted	<b>PSS</b>	<b>T9115</b>	100 - 300	0.3 - 2.0	0.08 - 0.3
	Light interrupted		<b>T9125</b>	80 - 180		
Finishing to medium cutting	Continuous to light interrupted	<b>PS</b>	<b>T9115</b>	100 - 300	0.5 - 2.5	0.08 - 0.3
	Light interrupted		<b>T9125</b>	80 - 180		
Medium cutting	Continuous to light interrupted	<b>PM</b>	<b>T9115</b>	100 - 300	1.0 - 3.0	0.15 - 0.3
	Light interrupted		<b>T9125</b>	80 - 180		

## Inserts Negative type

### Rhombic, 80°













Application	Chipbreaker Appearance (Cross section)	$f - a_p$	Cat. No	Stocked grades				Dimensions (mm)			
				Coated				I.C.dia ød	Thick- ness S	Hole dia ød1	Corner radius rE
				T9105	T9115	T9125	T9135				
Finishing	<b>ZF</b>		CNMG120404-ZF		●	●		12.7	4.76	5.16	0.4
		*CNMG120408-ZF		●	●	●	0.8				
	<b>NS</b>		*CNMG120408-NS		●	●		12.7	4.76	5.16	0.8
	<b>TSF</b>		CNMG120404-TSF	●	●	●		12.7	4.76	5.16	0.4
		*CNMG120408-TSF	●	●	●	●	0.8				
		CNMG120412-TSF		●	●		1.2				
	<b>TS</b>		CNMG120404-TS		●	●	●	12.7	4.76	5.16	0.4
		*CNMG120408-TS	●	●	●	●	0.8				
		CNMG120412-TS		●	●	●	1.2				
	<b>AFW</b>		CNMG120404-AFW		●	●		12.7	4.76	5.16	0.4
	*CNMG120408-AFW	●	●	●	●	0.8					
High feed, small depth of cut	<b>AS</b>		CNMG120404-AS	●	●	●		12.7	4.76	5.16	0.4
		*CNMG120408-AS	●	●	●	●	0.8				
		CNMG120412-AS		●	●	●	1.2				
	<b>ASW</b>		*CNMG120408-ASW	●	●	●		12.7	4.76	5.16	0.8
	CNMG120412-ASW	●	●	●		1.2					

\*Note: Chipbreaker cross sections are of \* marked insert.

● : Stocked items

# Rhombic, 80°

# Negative inserts













Application	Chipbreaker Appearance (Cross section)	f - ap	Cat. No	Stocked grades				Dimensions (mm)			
				Coated				I.C.dia ød	Thick- ness S	Hole dia ød1	Corner radius rE
				T9105	T9115	T9125	T9135				
Finishing to medium cutting	<b>NM</b> 		CNMG120408-NM	●	●	●	●	12.7	4.76	5.16	0.8
			*CNMG120412-NM		●	●	●				1.2
			<b>ZM</b> 		*CNMG120408-ZM		●	●	●	12.7	4.76
	CNMG120412-ZM		●		●	●	1.2				
	CNMG120416-ZM		●		●		1.6				
	Medium cutting	<b>TM</b> 		CNMG090304-TM		●	●		9.525	3.18	3.81
CNMG090308-TM					●	●	●	0.8			
CNMG120404-TM				●	●	●	●	12.7	4.76	5.16	0.4
*CNMG120408-TM				●	●	●	●				0.8
CNMG120412-TM				●	●	●	●				1.2
CNMG120416-TM					●	●	●				1.6
CNMG160612-TM				●	●	●	●	15.875	6.35	6.35	1.2
CNMG190608-TM				●	●	●	●	19.05	6.35	7.93	0.8
CNMG190612-TM		●	●	●	●	1.2					
<b>All-round</b> 			CNMG090304		●	●		9.525	3.18	3.81	0.4
			CNMG090308	●	●	●	●				0.8
			CNMG120404	●	●	●	●	12.7	4.76	5.16	0.4
			*CNMG120408	●	●	●	●				0.8
			CNMG120412	●	●	●	●				1.2
			CNMG120416	●	●	●	●				1.6
			CNMG160608	●	●	●	●	15.875	6.35	6.35	0.8
			CNMG160612	●	●	●	●				1.2
			CNMG160616	●	●	●	●	1.6			
			CNMG190608		●	●	●	19.05	6.35	7.93	0.8
			CNMG190612	●	●	●	●				1.2
			CNMG190616		●	●	●	1.6			
<b>DM</b> 		CNMG120404-DM		●	●		12.7	4.76	5.16	0.4	
		*CNMG120408-DM	●	●	●	●				0.8	
		CNMG120412-DM	●	●	●	●				1.2	
<b>S</b> 		CNMG120404R-S			●	●	12.7	4.76	5.16	0.4	
		CNMG120404L-S			●	●				0.4	
		*CNMG120408R-S			●	●				0.8	
		CNMG120408L-S			●	●				0.8	

\*Note: Chipbreaker cross sections are of \* marked insert.

● : Stocked items

## Rhombic, 80°

## Negative inserts









Application	Chipbreaker Appearance (Cross section)	f - ap	Cat. No	Stocked grades				Dimensions (mm)					
				Coated				I.C.dia ød	Thick- ness s	Hole dia ød1	Corner radius rε		
				T9105	T9115	T9125	T9135						
Medium to heavy cutting	<b>TH</b> 		*CNMG120408-TH	●	●	●	●	12.7	4.76	5.16	0.8		
			CNMG120412-TH	●	●	●	●				1.2		
			CNMG120416-TH	●	●	●	●				1.6		
			CNMG160612-TH	●	●	●	●	15.875	6.35	6.35	1.2		
			CNMG160616-TH	●	●	●	●				1.6		
			CNMG190612-TH	●	●	●	●	19.05	6.35	7.93	1.2		
			CNMG190616-TH	●	●	●	●				1.6		
	<b>THS</b> 		CNMG120408-THS	●	●	●	●	12.7	4.76	5.16	0.8		
			CNMG120412-THS	●	●	●	●				1.2		
			CNMG120416-THS	●	●	●	●				1.6		
			*CNMG160612-THS	●	●	●	●	15.875	6.35	6.35	1.2		
			CNMG160616-THS	●	●	●	●				1.6		
			CNMG190612-THS		●	●	●	19.05	6.35	7.93	1.2		
			CNMG190616-THS		●	●	●				1.6		
CNMG190624-THS		●	●	●				2.4					
CNMG250924-THS		●	●	●	25.4	9.52	9.12	2.4					
Medium to heavy cutting (Single sided)	<b>TRS</b> 		CNMM120408-TRS		●	●	●	12.7	4.76	5.16	0.8		
			CNMM120412-TRS		●	●	●				1.2		
			*CNMM160612-TRS		●	●	●	15.875	6.35	6.35	1.2		
			CNMM160616-TRS		●	●	●				1.6		
			CNMM190616-TRS		●	●	●	19.05	6.35	7.93	1.6		
			CNMM190624-TRS		●	●	●				2.4		
			CNMM250924-TRS		●	●	●	25.4	9.52	9.12	2.4		
			Heavy cutting (Single sided)	<b>TU</b> 		CNMM190612-TU			●	●	19.05	6.35	7.93
*CNMM190616-TU						●	●	1.6					
CNMM190624-TU		●				●	●				2.4		
CNMM250924-TU						●	●	25.4	9.52	9.12	2.4		
<b>TUS</b> 		*CNMM190608-TUS					●	●		19.05	6.35	7.93	0.8
		CNMM190612-TUS					●	●	●				1.2
		CNMM190616-TUS					●	●	●				1.6
		CNMM190624-TUS		●	●	●				2.4			
		CNMM190632-TUS		●	●					3.2			
		CNMM250916-TUS		●	●	●				1.6			
		CNMM250924-TUS		●	●	●	25.4	9.52	9.12	2.4			
CNMM250932-TUS		●	●					3.2					
Finishing to medium cutting			CNMA120408	●				12.7	4.76	5.16	0.8		
			CNMA120412	●							1.2		
			CNMA120416	●							1.6		

\*Note: Chipbreaker cross sections are of \* marked insert.

● : Stocked items

# Rhombic, 55°

# Negative inserts












Application	Chipbreaker Appearance (Cross section)	$f - a_p$	Cat. No	Stocked grades				Dimensions (mm)			
				Coated				I.C.dia ød	Thick- ness S	Hole dia ød1	Corner radius rε
				T9105	T9115	T9125	T9135				
		DNMG150404-ZF		●	●	●	12.7	4.76	5.16	0.4	
		DNMG150408-ZF		●	●	●				0.8	
		DNMG150412-ZF		●	●	●				1.2	
		DNMG150604-ZF		●	●		12.7	6.35	5.16	0.4	
		DNMG150608-ZF		●	●	●				0.8	
		DNMG150612-ZF		●	●					1.2	
		DNMG150404-NS			●	12.7	4.76	5.16	0.4		
		*DNMG150408-NS	●	●	●				0.8		
		DNMG150404-TSF	●	●	●	12.7	4.76	5.16	0.4		
		*DNMG150408-TSF	●	●	●				0.8		
		DNMG150412-TSF	●	●	●				1.2		
		DNMG150604-TSF		●	●		12.7	6.35	5.16	0.4	
		DNMG150608-TSF	●	●	●	0.8					
		DNMG150612-TSF	●	●	●	1.2					
		DNMG150404-TS		●	●	12.7	4.76	5.16	0.4		
		*DNMG150408-TS	●	●	●				0.8		
		DNMG150412-TS	●	●	●				1.2		
		DNMG150608-TS		●	●		12.7	6.35	5.16	0.8	
		DNMG150612-TS		●	●	1.2					

\*Note: Chipbreaker cross sections are of \* marked insert.

● : Stocked items

## Rhombic, 55°

## Negative inserts












Application	Chipbreaker Appearance (Cross section)	f - ap	Cat. No	Stocked grades				Dimensions (mm)			
				Coated				I.C.dia ød	Thick- ness S	Hole dia ød1	Corner radius rε
				T9105	T9115	T9125	T9135				
Medium cutting	<b>TM</b>	 	DNMG110404-TM		●	●	●	9.525	4.76	3.81	0.4
	DNMG110408-TM			●	●	●	0.8				
	DNMG150404-TM		●	●	●	●	12.7	4.76	5.16	0.4	
	*DNMG150408-TM		●	●	●	●				0.8	
	DNMG150412-TM		●	●	●	●				1.2	
	DNMG150416-TM			●	●					1.6	
	DNMG150604-TM		●	●	●	●	12.7	6.35	5.16	0.4	
	DNMG150608-TM		●	●	●	●				0.8	
	DNMG150612-TM		●	●	●	●				1.2	
	DNMG150616-TM			●	●					1.6	
	<b>All-round</b>	 	DNMG110404		●	●		9.525	4.76	3.81	0.4
	DNMG110408		●	●	●	●	0.8				
	DNMG150404			●	●	●	12.7	4.76	5.16	0.4	
	*DNMG150408		●	●	●	●				0.8	
	DNMG150412		●	●	●	●				1.2	
	DNMG150416			●	●					1.6	
	DNMG150604			●	●		12.7	6.35	5.16	0.4	
	DNMG150608		●	●	●	●				0.8	
	DNMG150612		●	●	●	●				1.2	
	DNMG150616			●	●					1.6	
	<b>DM</b>	 	*DNMG150408-DM		●	●	●	12.7	4.76	5.16	0.8
	DNMG150412-DM		●	●	●	●	1.2				
	DNMG150604-DM			●			12.7	6.35	5.16	0.4	
	DNMG150608-DM			●	●	●				0.8	
	DNMG150612-DM		●	●	●	●				1.2	
	DNMG150616-DM		●							1.6	
	<b>S</b>	 	DNMG150404R-S			●	●	12.7	4.76	5.16	0.4
	DNMG150404L-S				●	●	0.4				
*DNMG150408R-S				●	●	12.7	4.76	5.16	0.8		
DNMG150408L-S				●	●				0.8		
DNMG150604R-S				●	●	12.7	6.35	5.16	0.4		
DNMG150604L-S				●	●				0.4		
DNMG150608R-S				●	●				0.8		
DNMG150608L-S				●	●				0.8		
Medium to heavy cutting	<b>TH</b>	 	*DNMG150408-TH		●	●	●	12.7	4.76	5.16	0.8
	DNMG150412-TH			●	●	●	1.2				
	DNMG150416-TH			●	●		12.7	6.35	5.16	1.6	
	DNMG150608-TH			●	●	●				0.8	
	DNMG150612-TH			●	●	●				1.2	
	DNMG150616-TH			●	●	●				1.6	
	<b>THS</b>	 	DNMG150408-THS		●	●	●	12.7	4.76	5.16	0.8
	DNMG150412-THS			●	●	●	1.2				
	DNMG150416-THS			●	●		12.7	6.35	5.16	1.6	
	DNMG150608-THS			●	●	●				0.8	
	*DNMG150612-THS			●	●	●				1.2	
	DNMG150616-THS			●	●					1.6	

\*Note: Chipbreaker cross sections are of \* marked insert.

● : Stocked items

Square, 90°

Negative inserts















Application	Chipbreaker Appearance (Cross section)	$f - a_p$	Cat. No	Stocked grades				Dimensions (mm)				
				Coated				I.C.dia ød	Thick- ness S	Hole dia ød1	Corner radius rε	
				T9105	T9115	T9125	T9135					
Finishing	<b>NS</b> 		<b>*SNMG120408-NS</b>		●	●		12.7	4.76	5.16	0.8	
	<b>TSF</b> 		<b>SNMG120404-TSF</b>		●	●		12.7	4.76	5.16	0.4	
			<b>*SNMG120408-TSF</b>		●	●					0.8	
			<b>SNMG120412-TSF</b>		●	●					1.2	
		<b>TS</b> 		<b>SNMG120404-TS</b>		●	●		12.7	4.76	5.16	0.4
			<b>*SNMG120408-TS</b>	●	●	●	●	0.8				
			<b>SNMG120412-TS</b>		●	●	●	1.2				
	Finishing to medium cutting	<b>ZM</b> 		<b>*SNMG120408-ZM</b>		●	●	●	12.7	4.76	5.16	0.8
				<b>SNMG120412-ZM</b>		●	●	●				1.2
High feed, small depth of cut	<b>AS</b> 		<b>*SNMG120408-AS</b>	●	●			12.7	4.76	5.16	0.8	
Medium cutting	<b>TM</b> 		<b>SNMG090304-TM</b>		●	●	●	9.525	3.18	3.81	0.4	
			<b>SNMG090308-TM</b>		●	●	●				0.8	
			<b>SNMG120404-TM</b>		●	●					0.4	
			<b>*SNMG120408-TM</b>	●	●	●	●	12.7	4.76	5.16	0.8	
			<b>SNMG120412-TM</b>	●	●	●	●				1.2	
			<b>SNMG120416-TM</b>		●	●	●				1.6	
			<b>SNMG150608-TM</b>		●			15.875	6.35	6.35	0.8	
			<b>SNMG150612-TM</b>		●						1.2	
			<b>SNMG190608-TM</b>		●						0.8	
		<b>SNMG190612-TM</b>		●			19.05	6.35	7.93	1.2		

\*Note: Chipbreaker cross sections are of \* marked insert.

● : Stocked items

## Square, 90°

## Negative inserts



Application	Chipbreaker Appearance (Cross section)	f - ap	Cat. No	Stocked grades				Dimensions (mm)						
				Coated				I.C.dia ød	Thick- ness S	Hole dia ød1	Corner radius rε			
				T9105	T9115	T9125	T9135							
Medium cutting	<b>All-round</b> 		SNMG090304		●	●		9.525	3.18	3.81	0.4			
			SNMG090308		●	●	●				0.8			
			SNMG120404		●	●	●				0.4			
			*SNMG120408	●	●	●	●	12.7	4.76	5.16	0.8			
			SNMG120412	●	●	●	●				1.2			
			SNMG120416	●	●	●	●				1.6			
			SNMG120420		●	●	●				2.0			
			SNMG150612		●	●	●				15.875	6.35	6.35	1.2
			SNMG150616		●	●	●							1.6
			SNMG190612		●	●	●	19.05	6.35	7.93	1.2			
			SNMG190616		●	●	●				1.6			
			SNMG250724		●	●	●	25.4	7.94	9.12	2.4			
			<b>DM</b> 		*SNMG120408-DM		●	●		12.7	4.76	5.16	0.8	
					SNMG120412-DM		●	●	●				1.2	
<b>S</b> 		SNMG120404R-S			●	●	12.7	4.76	5.16	0.4				
		SNMG120404L-S			●	●				0.4				
		*SNMG120408R-S			●	●				0.8				
		SNMG120408L-S			●	●				0.8				
Medium to heavy cutting	<b>TH</b> 		*SNMG120408-TH		●	●	●	12.7	4.76	5.16	0.8			
			SNMG120412-TH		●	●	●				1.2			
			SNMG150612-TH	●	●	●		15.875	6.35	6.35	1.2			
			SNMG150616-TH	●	●	●	1.6							
			SNMG190612-TH	●	●	●	●	19.05	6.35	7.93	1.2			
	SNMG190616-TH	●	●	●	●	1.6								
	<b>THS</b> 		SNMG120408-THS		●	●	●	12.7	4.76	5.16	0.8			
			SNMG120412-THS		●	●	●				1.2			
			SNMG150612-THS		●	●		15.875	6.35	6.35	1.2			
			SNMG150616-THS		●	●	●				1.6			
			*SNMG190608-THS		●	●	●	19.05	6.35	7.93	0.8			
			SNMG190612-THS		●	●	●				1.2			
			SNMG190616-THS		●	●	●				1.6			
			SNMG190624-THS		●	●	●				2.4			
			SNMG190624-THS		●	●	●	25.4	7.94	9.12	1.6			
SNMG250716-THS				●	●	●	2.4							
<b>TRS</b> 		*SNMM150612-TRS		●	●	●	15.875	6.35	6.35	1.2				
		SNMM150616-TRS		●	●	●				1.6				
		SNMM190616-TRS		●	●	●	19.05	6.35	7.93	1.6				
		SNMM190624-TRS		●	●	●				2.4				
		SNMM250924-TRS		●	●	●	25.4	9.52	9.12	2.4				
Heavy cutting	<b>TU</b> 		*SNMM190616-TU			●	19.05	6.35	7.93	1.6				
			SNMM190624-TU			●				●	2.4			
			SNMM250724-TU			●	●	25.4	7.94	9.12	2.4			
			SNMM250924-TU		●	●		25.4	9.52	9.12	2.4			

\*Note: Chipbreaker cross sections are of \* marked insert.













● : Stocked items

# Square, 90°

# Negative inserts

Application	Chipbreaker Appearance (Cross section)	f - ap	Cat. No	Stocked grades				Dimensions (mm)					
				Coated				I.C.dia ød	Thick- ness S	Hole dia ød1	Corner radius rε		
				T9105	T9115	T9125	T9135						
Heavy cutting	<b>TUS</b> 		*SNMM190612-TUS	●	●	●	19.05	6.35	7.93	1.2			
			SNMM190616-TUS	●	●	●				1.6			
			SNMM190624-TUS	●	●	●				2.4			
						SNMM250724-TUS	●	●	●	25.4	7.94	9.12	2.4
						SNMM250732-TUS	●	●	●				3.2
						SNMM250924-TUS	●	●	●	25.4	9.52	9.12	2.4
						SNMM250932-TUS	●	●	●				3.2

# Triangular, 60°













Application	Chipbreaker Appearance (Cross section)	f - ap	Cat. No	Stocked grades				Dimensions (mm)			
				Coated				I.C.dia ød	Thick- ness S	Hole dia ød1	Corner radius rε
				T9105	T9115	T9125	T9135				
Finishing	<b>ZF</b> 		TNMG160404-ZF	●	●	●	9.525	4.76	3.81	0.4	
			*TNMG160408-ZF	●	●	●				0.8	
	<b>NS</b> 		TNMG160404-NS	●	●	●	9.525	4.76	3.81	0.4	
			*TNMG160408-NS	●	●	●				0.8	
	<b>TSF</b> 		TNMG160404-TSF	●	●	●	9.525	4.76	3.81	0.4	
			*TNMG160408-TSF	●	●	●				0.8	
			TNMG160412-TSF	●	●	●				1.2	
	<b>TS</b> 		TNMG160404-TS	●	●	●	9.525	4.76	3.81	0.4	
			*TNMG160408-TS	●	●	●				0.8	
			TNMG160412-TS	●	●	●				1.2	
	High feed, small depth of cut	<b>AS</b> 		TNMG160404-AS	●	●	●	9.525	4.76	3.81	0.4
				*TNMG160408-AS	●	●	●				0.8
TNMG160412-AS				●	●	●	1.2				
Boring (Double sided)	<b>CB</b> 		TNMG110304-CB	●	●	●	6.35	3.18	2.26	0.4	
			*TNMG110308-CB	●	●	●				0.8	

\*Note: Chipbreaker cross sections are of \* marked insert.

● : Stocked items

## Triangular, 60°

## Negative inserts



Application	Chipbreaker Appearance (Cross section)	$f - a_p$	Cat. No	Stocked grades				Dimensions (mm)			
				Coated				I.C. dia $\phi d$	Thick- ness S	Hole dia $\phi d1$	Corner radius $r\epsilon$
				T9105	T9115	T9125	T9135				
Finishing to medium cutting	<b>NM</b> 		*TNMG160408-NM TNMG160412-NM			●		9.525	4.76	3.81	0.8 1.2
	<b>ZM</b> 		TNMG160404-ZM TNMG160408-ZM *TNMG160412-ZM TNMG220412-ZM		●	●	●	9.525 12.7	4.76	3.81 5.16	0.4 0.8 1.2 1.2
	<b>TM</b> 		TNMG110304-TM TNMG110308-TM TNMG160404-TM *TNMG160408-TM TNMG160412-TM TNMG220408-TM TNMG220412-TM TNMG220416-TM		●	●	●	6.35 9.525 12.7	3.18	2.26	0.4 0.8 0.4 0.8 1.2 0.8 1.2 1.6
	<b>All-round</b> 		TNMG110304 TNMG110308 TNMG160404 *TNMG160408 TNMG160412 TNMG160416 TNMG160420 TNMG220408 TNMG220412 TNMG220416		●	●	●	6.35 9.525 12.7	3.18	2.26	0.4 0.8 0.4 0.8 1.2 1.6 2.0 0.8 1.2 1.6
	<b>DM</b> 		*TNMG160408-DM TNMG160412-DM	●	●	●	●	9.525	4.76	3.81	0.8 1.2
Medium cutting	<b>S</b> 		TNMG160404R-S TNMG160404L-S *TNMG160408R-S TNMG160408L-S TNMG220404R-S TNMG220404L-S TNMG220408R-S TNMG220408L-S			●	●	9.525 12.7	4.76	3.81	0.4 0.4 0.8 0.8 0.4 0.4 0.8 0.8
	<b>TH</b> 		*TNMG220408-TH TNMG220412-TH		●	●	●	12.7	4.76	5.16	0.8 1.2

\*Note: Chipbreaker cross sections are of \* marked insert.













● : Stocked items

# Triangular, 60°

# Negative inserts

Application	Chipbreaker Appearance (Cross section)	$f - a_p$	Cat. No	Stocked grades				Dimensions (mm)			
				Coated				I.C.dia ød	Thick- ness s	Hole dia ød1	Corner radius rε
				T9105	T9115	T9125	T9135				
Medium to heavy cutting	<b>THS</b> 		TNMG220408-THS	●	●	●	12.7	4.76	5.16	0.8	
			*TNMG220412-THS	●	●	●				1.2	

# Trigon, 80°















Application	Chipbreaker Appearance (Cross section)	$f - a_p$	Cat. No	Stocked grades				Dimensions (mm)			
				Coated				I.C.dia ød	Thick- ness s	Hole dia ød1	Corner radius rε
				T9105	T9115	T9125	T9135				
Finishing	<b>ZF</b> 		WNMG060404-ZF	●	●		9.525	4.76	3.81	0.4	
			WNMG060408-ZF	●	●					0.8	
			WNMG080404-ZF	●	●	●	12.7	4.76	5.16	0.4	
			*WNMG080408-ZF	●	●	●				0.8	
	<b>NS</b> 		WNMG080404-NS	●	●		12.7	4.76	5.16	0.4	
			*WNMG080408-NS	●	●					0.8	
	<b>TSF</b> 		WNMG060404-TSF	●	●		9.525	4.76	3.81	0.4	
			*WNMG060408-TSF	●	●					0.8	
			WNMG080404-TSF	●	●	●	12.7	4.76	5.16	0.4	
			WNMG080412-TSF	●	●	●				1.2	
	<b>TS</b> 		WNMG080404-TS	●	●	●	12.7	4.76	5.16	0.4	
			*WNMG080408-TS	●	●	●				0.8	
WNMG080412-TS			●	●	●	1.2					
<b>AFW</b> 		WNMG060404-AFW	●	●		9.525	4.76	3.81	0.4		
		WNMG060408-AFW	●	●	●				0.8		
		WNMG080404-AFW	●	●		12.7	4.76	5.16	0.4		
		*WNMG080408-AFW	●	●	●				0.8		
High feed, small depth of cut	<b>AS</b> 		WNMG080404-AS	●			12.7	4.76	5.16	0.4	
			*WNMG080408-AS	●	●	●				0.8	
			WNMG080412-AS	●	●	●	1.2				

\*Note: Chipbreaker cross sections are of \* marked insert.

● : Stocked items

## Trigon, 80°

## Negative inserts





Application	Chipbreaker Appearance (Cross section)	$f - a_p$	Cat. No	Stocked grades				Dimensions (mm)			
				Coated				I.C.dia ød	Thick- ness s	Hole dia ød1	Corner radius rε
				T9105	T9115	T9125	T9135				
High feed, small depth of cut	<b>ASW</b> 		WNUMG060408-ASW	●	●	●		9.525	4.76	3.81	0.8
			WNUMG060412-ASW	●	●	●	●				1.2
			*WNUMG080408-ASW	●	●	●	●	12.7	4.76	5.16	0.8
			WNUMG080412-ASW	●	●	●	●				1.2
Boring (Double sided)	<b>CB</b> 		WNUMG060404-CB			●		9.525	4.76	3.81	0.4
			*WNUMG060408-CB			●					0.8
Finishing to medium cutting	<b>NM</b> 		*WNUMG080408-NM	●	●	●		12.7	4.76	5.16	0.8
			WNUMG080412-NM	●	●	●	●				1.2
	<b>ZM</b> 		WNUMG060408-ZM		●	●	●	9.525	4.76	3.81	0.8
			WNUMG060412-ZM		●	●	●				1.2
			*WNUMG080408-ZM		●	●	●	12.7	4.76	5.16	0.8
			WNUMG080412-ZM		●	●	●				1.2
			WNUMG080416-ZM		●	●					1.6
Medium cutting	<b>TM</b> 		WNUMG060404-TM		●	●	●	9.525	4.76	3.81	0.4
			WNUMG060408-TM	●	●	●	●				0.8
	<b>All-round</b> 		WNUMG080404-TM	●	●	●	●	12.70	4.76	5.16	0.4
			*WNUMG080408-TM	●	●	●	●				0.8
			WNUMG080412-TM	●	●	●	●	12.7	4.76	5.16	1.2
			WNUMG080416-TM	●	●	●					1.6
			WNUMG060404		●	●		9.525	4.76	3.81	0.4
			WNUMG060408		●	●					0.8
	<b>DM</b> 		*WNUMG080408	●	●	●	●	12.7	4.76	5.16	0.4
			*WNUMG080408	●	●	●	●				0.8
			WNUMG080412	●	●	●	●				1.2
			WNUMG080416	●	●	●	●				1.6
			*WNUMG080408-DM	●	●	●	●	12.7	4.76	5.16	0.8
			WNUMG080412-DM	●	●	●	●				1.2

\*Note: Chipbreaker cross sections are of \* marked insert.











● : Stocked items

## Trigon, 80°

## Negative inserts

Application	Chipbreaker Appearance (Cross section)	$f - a_p$	Cat. No	Stocked grades				Dimensions (mm)			
				Coated				I.C.dia ød	Thick- ness s	Hole dia ød1	Corner radius rε
				T9105	T9115	T9125	T9135				
Medium to heavy cutting	<b>TH</b> 		*WNMG080408-TH	★	●	●	●	12.7	4.76	5.16	0.8
	WNMG080412-TH		●	●	●	●	1.2				
	WNMG080416-TH		●	●	●		1.6				
	WNMG100612-TH			●	●		1.2				
	WNMG100616-TH			●	●		1.6				
	<b>THS</b> 		WNMG080408-THS	●	●	●	●	12.7	4.76	5.16	0.8
	*WNMG080412-THS		●	●	●	●	1.2				
	WNMG080416-THS			●	●		1.6				
	WNMG100612-THS			●	●	●	1.2				
	WNMG100616-THS			●	●	●	1.6				

## Rhombic, 35°





Application	Chipbreaker Appearance (Cross section)	$f - a_p$	Cat. No	Stocked grades				Dimensions (mm)				
				Coated				I.C.dia ød	Thick- ness s	Hole dia ød1	Corner radius rε	
				T9105	T9115	T9125	T9135					
Finishing	<b>ZF</b> 		VNMG160404-ZF		●	●	●	9.525	4.76	3.81	0.4	
	*VNMG160408-ZF			●	●	●	0.8					
	VNMG160412-ZF			●	●	●	1.2					
	<b>TSF</b> 		VNMG160404-TSF	●	●	●	●	9.525	4.76	3.81	0.4	
	*VNMG160408-TSF		●	●	●	●	0.8					
	VNMG160412-TSF		●	●	●	●	1.2					
	<b>TS</b> 		VNMG160404-TS		●	●	●	9.525	4.76	3.81	0.4	
	*VNMG160408-TS			●	●	●	0.8					
	VNMG160412-TS			●	●	●	1.2					
	Finishing to medium cutting	<b>ZM</b> 		*VNMG160408-ZM		●	●	●	9.525	4.76	3.81	0.8
		VNMG160412-ZM			●	●	●	1.2				
	Medium cutting	<b>TM</b> 		VNMG160404-TM	●	●	●	●	9.525	4.76	3.81	0.4
*VNMG160408-TM		●		●	●	●	0.8					
VNMG160412-TM		●		●	●	●	1.2					

\*Note: Chipbreaker cross sections are of \* marked insert.





● : Stocked items

## Rhombic, 35°



## Negative inserts

Application	Chipbreaker Appearance (Cross section)	$f - a_p$	Cat. No	Stocked grades				Dimensions (mm)			
				Coated				I.C.dia ød	Thick- ness s	Hole dia ød1	Corner radius rε
				T9105	T9115	T9125	T9135				
Medium cutting	<b>All-round</b> 		VNMG160404	●	●	●	●	9.525	4.76	3.81	0.4
			*VNMG160408	●	●	●	●				0.8
			VNMG160412		●	●					1.2
	<b>DM</b> 		*VNMG160408-DM	●	●	●	●	9.525	4.76	3.81	0.8
			VNMG160412-DM		●	●	●				1.2

## Rhombic, 25°

Application	Chipbreaker Appearance (Cross section)	$f - a_p$	Cat. No	Stocked grades				Dimensions (mm)			
				Coated				I.C.dia ød	Thick- ness s	Hole dia ød1	Corner radius rε
				T9105	T9115	T9125	T9135				
Finishing to medium cutting	<b>ZF</b> 		YNMG160404-ZF			●	●	9.525	4.76	3.81	0.4
			*YNMG160408-ZF			●	●				0.8
	<b>ZM</b> 		YNMG160404-ZM			●	●	9.525	4.76	3.81	0.4
			*YNMG160408-ZM			●	●				0.8

## Round









Application	Chipbreaker Appearance (Cross section)	$f - a_p$	Cat. No	Stocked grades				Dimensions (mm)			
				Coated				I.C.dia ød	Thick- ness s	Hole dia ød1	Corner radius rε
				T9105	T9115	T9125	T9135				
Heavy cutting	<b>61</b> 		RNMG090300-61		●	●		9.525	3.97	3.81	-
			*RNMG120400-61	●	●	●	●	12.7	4.76	5.16	-
			RNMG150600-61		●	●		15.875	6.35	6.43	-
			RNMG190600-61		●	●	●	19.05	6.35	7.93	-
			RNMG250900-61		●	●		25.4	9.52	9.22	-

\*Note: Chipbreaker cross sections are of \* marked insert.





● : Stocked items

# Inserts Positive type

## Rhombic, 80° (7°)

Application	Chipbreaker Appearance (Cross section)	f - ap	Cat. No	Stocked grades				Dimensions (mm)			
				Coated				I.C.dia ød	Thick- ness s	Hole dia ød1	Corner radius rε
				T9105	T9115	T9125	T9135				
Finishing	<b>PSF</b> 		CCMT060204-PSF	●	●		6.35	2.38	2.8	0.4	
			CCMT09T304-PSF	●	●		9.525	3.97	4.4	0.4	
			*CCMT09T308-PSF	●	●					0.8	
Finishing to light cutting	<b>PSS</b> 		CCMT060204-PSS	●	●		6.35	2.38	2.8	0.4	
			CCMT060208-PSS	●	●					0.8	
			*CCMT09T304-PSS	●	●		9.525	3.97	4.4	0.4	
			CCMT09T308-PSS	●	●					0.8	
			CCMT120404-PSS	●	●					0.4	
			CCMT120408-PSS	●	●		12.7	4.76	5.5	0.8	
			CCMT120412-PSS	●	●					1.2	
Finishing to medium cutting	<b>PS</b> 		CCMT060202-PS	●	●		6.35	2.38	2.8	0.2	
			CCMT060204-PS	●	●					0.4	
			*CCMT060208-PS	●	●					0.8	
			CCMT09T302-PS	●	●		9.525	3.97	4.4	0.2	
			CCMT09T304-PS	●	●					0.4	
			CCMT09T308-PS	●	●					0.8	
			CCMT120404-PS	●	●					0.4	
			CCMT120408-PS	●	●		12.70	4.76	5.5	0.8	
			CCMT120412-PS	●	●					1.2	
Medium cutting	<b>PM</b> 		CCMT060204-PM	●	●		6.35	2.38	2.8	0.4	
			CCMT060208-PM	●	●					0.8	
			CCMT09T304-PM	●	●		9.525	3.97	4.4	0.4	
			*CCMT09T308-PM	●	●					0.8	
			CCMT09T312-PM	●	●					1.2	

## Rhombic, 80° (11°)





Application	Chipbreaker Appearance (Cross section)	f - ap	Cat. No	Stocked grades				Dimensions (mm)			
				Coated				I.C.dia ød	Thick- ness s	Hole dia ød1	Corner radius rε
				T9105	T9115	T9125	T9135				
Finishing	<b>PSF</b> 		CPMT060204-PSF	●	●		6.35	2.38	2.8	0.4	
			CPMT080204-PSF	●	●		7.94	2.38	3.4	0.4	
			*CPMT090304-PSF	●	●		9.525	3.18	4.4	0.4	
			CPMT09T304-PSF	●	●		9.525	3.97	4.4	0.4	
Finishing to light cutting	<b>PSS</b> 		CPMT060204-PSS	●	●		6.35	2.38	2.8	0.4	
			CPMT080204-PSS	●	●		7.94	2.38	3.4	0.4	
			CPMT080208-PSS	●	●					0.8	
			*CPMT090304-PSS	●	●		9.525	3.18	4.4	0.4	
			CPMT090308-PSS	●	●					0.8	
			CPMT09T304-PSS	●	●		9.523	3.97	4.4	0.4	
			CPMT09T308-PSS	●	●					0.8	

\*Note: Chipbreaker cross sections are of \* marked insert.









● : Stocked items

## Rhombic, 80° (11°)

## Positive inserts

Application	Chipbreaker Appearance (Cross section)	$f - a_p$	Cat. No	Stocked grades				Dimensions (mm)					
				Coated				I.C.dia $\phi d$	Thick- ness s	Hole dia $\phi d1$	Corner radius $r\epsilon$		
				T9105	T9115	T9125	T9135						
Finishing to medium cutting	<b>PS</b> 		CPMT060202-PS		●	●		6.35	2.38	2.8	0.2		
			CPMT060204-PS		●	●					0.4		
			CPMT080202-PS		●	●					0.2		
										7.94	2.38	3.4	0.4
			CPMT080204-PS		●	●		0.4					
			CPMT080208-PS		●	●		0.8					
			*CPMT090304-PS		●	●		9.525	3.18	4.4	0.4		
			CPMT090308-PS		●	●					0.8		
			CPMT09T302-PS		●	●					0.2		
										9.525	3.97	4.4	0.4
CPMT09T304-PS		●	●		0.4								
CPMT09T308-PS		●	●		0.8								
Medium cutting	<b>PM</b> 		CPMT060208-PM		●	●		6.35	2.38	2.8	0.8		
			*CPMT090304-PM		●	●		9.525	3.18	4.4	0.4		
			CPMT090308-PM		●	●					0.8		

## Rhombic, 55° (7°)





Application	Chipbreaker Appearance (Cross section)	$f - a_p$	Cat. No	Stocked grades				Dimensions (mm)					
				Coated				I.C.dia $\phi d$	Thick- ness s	Hole dia $\phi d1$	Corner radius $r\epsilon$		
				T9105	T9115	T9125	T9135						
Finishing	<b>PSF</b> 		DCMT070204-PSF		●	●		6.35	2.38	2.8	0.4		
			*DCMT11T304-PSF		●	●					9.525	3.97	4.4
			DCMT11T308-PSF		●	●		0.8					
Finishing to light cutting	<b>PSS</b> 		DCMT070204-PSS		●	●		6.35	2.38	2.8	0.4		
			DCMT070208-PSS		●	●					0.8		
			*DCMT11T304-PSS		●	●		9.525	3.97	4.4	0.4		
			DCMT11T308-PSS		●	●					0.8		
			DCMT11T312-PSS		●	●					1.2		
Finishing to medium cutting	<b>PS</b> 		DCMT070202-PS		●	●		6.35	2.38	2.8	0.2		
			*DCMT070204-PS		●	●					0.4		
			DCMT070208-PS		●	●					0.8		
										9.525	3.97	4.4	0.2
			DCMT11T302-PS		●	●		0.4					
			*DCMT11T304-PS		●	●		0.8					
			DCMT11T308-PS		●	●		1.2					
Medium cutting	<b>PM</b> 		DCMT070204-PM		●	●		6.35	2.38	2.8	0.4		
			DCMT070208-PM		●	●					0.8		
			DCMT11T304-PM		●	●		9.525	3.97	4.4	0.4		
			*DCMT11T308-PM		●	●					0.8		
			DCMT11T312-PM		●	●					1.2		

\*Note: Chipbreaker cross sections are of \* marked insert.



● : Stocked items

## Square, 90° (7°)





## Positive inserts

Application	Chipbreaker Appearance (Cross section)	$f - a_p$	Cat. No	Stocked grades				Dimensions (mm)			
				Coated				I.C.dia ød	Thick- ness s	Hole dia ød1	Corner radius rε
				T9105	T9115	T9125	T9135				
Finishing to medium cutting	<b>PS</b> 		*SCMT09T304-PS	●	●		9.525	3.97	4.4	0.4	
			SCMT09T308-PS	●	●					0.8	
			SCMT120404-PS	●	●		12.7	4.76	5.5	0.4	
			SCMT120408-PS	●	●					0.8	
Medium cutting	<b>PM</b> 		*SCMT09T304-PM	●	●		9.525	3.97	4.4	0.4	
			SCMT09T308-PM	●	●					0.8	
			SCMT120408-PM	●	●		12.7	4.76	5.5	0.8	
			SCMT120412-PM		●					1.2	

## Square, 90° (11°)

Application	Chipbreaker Appearance (Cross section)	$f - a_p$	Cat. No	Stocked grades				Dimensions (mm)			
				Coated				I.C.dia ød	Thick- ness s	Hole dia ød1	Corner radius rε
				T9105	T9115	T9125	T9135				
Finishing to medium cutting	<b>PS</b> 		SPMT090304-PS	●	●		9.525	3.18	4.4	0.4	
			SPMT090308-PS	●	●					0.8	
			SPMT120404-PS	●	●		12.7	4.76	5.5	0.4	
			*SPMT120408-PS	●	●					0.8	

## Triangular, 60° (7°)





Application	Chipbreaker Appearance (Cross section)	$f - a_p$	Cat. No	Stocked grades				Dimensions (mm)			
				Coated				I.C.dia ød	Thick- ness s	Hole dia ød1	Corner radius rε
				T9105	T9115	T9125	T9135				
Finishing	<b>PSF</b> 		TCMT090204-PSF	●	●		5.56	2.38	2.5	0.4	
			*TCMT110204-PSF	●	●					6.35	2.38
			TCMT110304-PSF	●	●		6.35	3.18	2.8	0.4	
			TCMT16T304-PSF	●	●					9.525	3.97
Finishing to light cutting	<b>PSS</b> 		TCMT090204-PSS	●	●		5.56	2.38	2.5	0.4	
			TCMT090208-PSS	●	●					0.8	
			*TCMT110204-PSS	●	●		6.35	2.38	2.8	0.4	
			TCMT110208-PSS	●	●					0.8	
			TCMT110304-PSS	●	●		6.38	3.18	2.8	0.4	
			TCMT110308-PSS	●	●					0.8	
			TCMT16T304-PSS	●	●		9.525	3.97	4.4	0.4	
TCMT16T308-PSS	●	●		0.8							
TCMT16T312-PSS	●	●		1.2							

\*Note: Chipbreaker cross sections are of \* marked insert.







● : Stocked items

## Triangular, 60° (7°)

## Positive inserts

Application	Chipbreaker Appearance (Cross section)	f - ap	Cat. No	Stocked grades				Dimensions (mm)			
				Coated				I.C.dia ød	Thick- ness S	Hole dia ød1	Corner radius rE
				T9105	T9115	T9125	T9135				
Finishing to medium cutting	<b>PS</b> 		TCMT110202-PS		●	●		6.35	2.38	2.8	0.2
			*TCMT110204-PS		●	●					0.4
			TCMT110208-PS		●	●					0.8
			TCMT110302-PS		●	●		6.35	3.18	2.8	0.2
			TCMT110304-PS		●	●					0.4
			TCMT110308-PS		●	●					0.8
			TCMT16T302-PS		●	●		9.525	3.97	4.4	0.2
			TCMT16T304-PS		●	●					0.4
			TCMT16T308-PS		●	●					0.8
Medium cutting	<b>PM</b> 		TCMT110204-PM		●	●		6.35	2.38	2.8	0.4
			TCMT110208-PM		●	●					0.8
			*TCMT16T304-PM		●	●		9.525	3.97	4.4	0.4
			TCMT16T308-PM		●	●					0.8
			TCMT16T312-PM		●	●					1.2

## Triangular, 60° (11°)

Application	Chipbreaker Appearance (Cross section)	f - ap	Cat. No	Stocked grades				Dimensions (mm)			
				Coated				I.C.dia ød	Thick- ness S	Hole dia ød1	Corner radius rE
				T9105	T9115	T9125	T9135				
Finishing	<b>PSF</b> 		TPMT090204-PSF		●	●		5.56	2.38	2.5	0.4
			*TPMT110204-PSF		●	●		6.35	2.38	2.8	0.4
			TPMT110304-PSF		●	●		6.35	3.18	3.4	0.4
			TPMT130304-PSF		●	●		7.94	3.18	3.4	0.4
			TPMT16T304-PSF		●	●		9.525	3.97	4.4	0.4
Finishing to light cutting	<b>PSS</b> 		TPMT090204-PSS		●	●		5.56	2.38	2.5	0.4
			TPMT090208-PSS		●	●					0.8
			*TPMT110204-PSS		●	●		6.35	2.38	2.8	0.4
			TPMT110208-PSS		●	●					0.8
			TPMT110304-PSS		●	●		6.35	3.18	3.4	0.4
			TPMT110308-PSS		●	●					0.8
			TPMT130304-PSS		●	●		7.94	3.18	3.4	0.4
			TPMT130308-PSS		●	●					0.8
			TPMT16T304-PSS		●	●		9.525	3.97	4.4	0.4
TPMT16T308-PSS		●	●		0.8						
Finishing to medium cutting	<b>PS</b> 		TPMT090202-PS		●	●		5.56	2.38	2.5	0.2
			TPMT090204-PS		●	●					0.4
			TPMT090208-PS		●	●					0.8
			TPMT110202-PS		●	●		6.35	2.38	2.8	0.2
			*TPMT110204-PS		●	●					0.4
			TPMT110208-PS		●	●		6.35	3.18	3.4	0.8
			TPMT110304-PS		●	●					0.4
			TPMT110308-PS		●	●					0.8
			TPMT130302-PS		●	●		7.94	3.18	3.4	0.2
			TPMT130304-PS		●	●					0.4
			TPMT130308-PS		●	●		9.525	3.97	4.4	0.8
			TPMT16T304-PS		●	●					0.4
			TPMT16T308-PS		●	●					0.8

\*Note: Chipbreaker cross sections are of \* marked insert.

● : Stocked items

## Triangular, 60° (11°)

## Positive inserts

Application	Chipbreaker Appearance (Cross section)	$f - a_p$	Cat. No	Stocked grades				Dimensions (mm)			
				Coated				I.C.dia $\varnothing d$	Thick- ness S	Hole dia $\varnothing d1$	Corner radius $r\epsilon$
				T9105	T9115	T9125	T9135				
Medium cutting			TPMT110204-PM		●	●		6.35	2.38	2.8	0.4
			TPMT110208-PM		●	●					0.8
			TPMT110304-PM		●	●		6.35	3.18	3.4	0.4
			TPMT110308-PM		●	●					0.8
			TPMT130304-PM				●	7.94	3.18	3.4	0.4
			TPMT130308-PM				●				0.8
			*TPMT16T304-PM				●	9.525	3.97	4.4	0.4
			TPMT16T308-PM				●				0.8
			TPMT16T312-PM				●				1.2

## Triangular, 60° (11°) without hole

Application	Chipbreaker Appearance (Cross section)	$f - a_p$	Cat. No	Stocked grades				Dimensions (mm)			
				Coated				I.C.dia $\varnothing d$	Thick- ness S	Hole dia $\varnothing d1$	Corner radius $r\epsilon$
				T9105	T9115	T9125	T9135				
Finishing to medium cutting			*TPMR110304-PS			●		6.35	3.18	-	0.4
			TPMR110308-PS			●				0.8	
			TPMR160304-PS			●		9.525	3.18	-	0.4
			TPMR160308-PS			●				0.8	

## Trigon, 80° (11°)

Application	Chipbreaker Appearance (Cross section)	$f - a_p$	Cat. No	Stocked grades				Dimensions (mm)			
				Coated				I.C.dia $\varnothing d$	Thick- ness S	Hole dia $\varnothing d1$	Corner radius $r\epsilon$
				T9105	T9115	T9125	T9135				
Heavy cutting			*WPMT090725ZPR-ML		●	●		15.0	7	5.5	2.5
			WPMT090725ZPL-ML		●	●					

## Rhombic, 35° (5°)



Application	Chipbreaker Appearance (Cross section)	$f - a_p$	Cat. No	Stocked grades				Dimensions (mm)			
				Coated				I.C.dia $\varnothing d$	Thick- ness S	Hole dia $\varnothing d1$	Corner radius $r\epsilon$
				T9105	T9115	T9125	T9135				
Finishing			VBMT110304-PSF		●	●		6.35	3.18	2.8	0.4
			*VBMT160404-PSF		●	●					9.525
Finishing to light cutting			VBMT110304-PSS		●	●		6.35	3.18	2.8	0.4
			VBMT110308-PSS		●	●					0.8
			*VBMT160404-PSS		●	●		9.525	4.76	4.4	0.4
			VBMT160408-PSS		●	●					0.8
			VBMT160412-PSS		●	●					1.2

\*Note: Chipbreaker cross sections are of \* marked insert.








● : Stocked items

## Rhombic, 35° (5°)





## Positive inserts

Application	Chipbreaker Appearance (Cross section)	$f - a_p$	Cat. No	Stocked grades				Dimensions (mm)			
				Coated				I.C.dia ød	Thick- ness s	Hole dia ød1	Corner radius rε
				T9105	T9115	T9125	T9135				
Finishing to medium cutting	<b>PS</b>  		*VBMT110302-PS	●	●		6.35	3.18	2.8	0.2	
			VBMT110304-PS	●	●					0.4	
			VBMT110308-PS	●	●					0.8	
			VBMT160402-PS	●	●		9.525	4.76	4.4	0.2	
			VBMT160404-PS	●	●					0.4	
			VBMT160408-PS	●	●					0.8	

## Rhombic, 35° (7°)

Application	Chipbreaker Appearance (Cross section)	$f - a_p$	Cat. No	Stocked grades				Dimensions (mm)			
				Coated				I.C.dia ød	Thick- ness s	Hole dia ød1	Corner radius rε
				T9105	T9115	T9125	T9135				
Finishing	<b>PSF</b>  		VCMT080204-PSF	●	●		4.76	2.38	2.3	0.4	
			VCMT110304-PSF	●	●		6.35	3.18	2.8	0.4	
			*VCMT160404-PSF	●	●		9.525	4.76	4.4	0.4	
			VCMT160408-PSF	●	●					0.8	
Finishing to light cutting	<b>PSS</b>  		VCMT110304-PSS	●	●		6.35	3.18	2.8	0.4	
			VCMT110308-PSS	●	●					0.8	
			*VCMT160404-PSS	●	●		9.525	4.76	4.4	0.4	
			VCMT160408-PSS	●	●					0.8	
Finishing to medium cutting	<b>PS</b>  		VCMT110302-PS	●	●		6.35	3.18	2.8	0.2	
			VCMT110304-PS	●	●					0.4	
			*VCMT110308-PS	●	●					0.8	
			VCMT160404-PS	●	●		9.525	4.76	4.4	0.4	
			VCMT160408-PS	●	●					0.8	

## Rhombic, 25° (7°)







Application	Chipbreaker Appearance (Cross section)	$f - a_p$	Cat. No	Stocked grades				Dimensions (mm)			
				Coated				I.C.dia ød	Thick- ness s	Hole dia ød1	Corner radius rε
				T9105	T9115	T9125	T9135				
Finishing to medium cutting	<b>ZF</b>  		YWMT11T202-ZF		●		4.679	2.78	2.3	0.2	
			YWMT11T204-ZF		●					0.4	
			*YWMT16T302-ZF		●		7.018	3.97	2.86	0.2	
			YWMT16T304-ZF		●					0.4	
			YWMT16T308-ZF		●					0.8	
	<b>ZM</b>  		YWMT11T204-ZM		●		4.679	2.78	2.3	0.4	
			*YWMT16T304-ZM		●		7.018	3.97	2.86	0.4	
			YWMT16T308-ZM		●					0.8	

\*Note: Chipbreaker cross sections are of \* marked insert.

● : Stocked items

# Round, (7°)

# Positive inserts

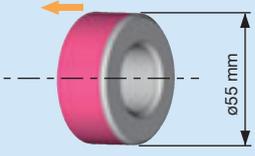
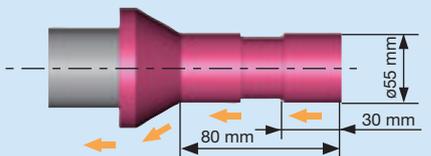
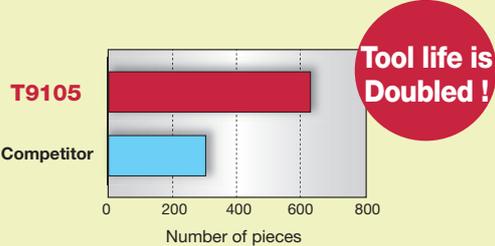
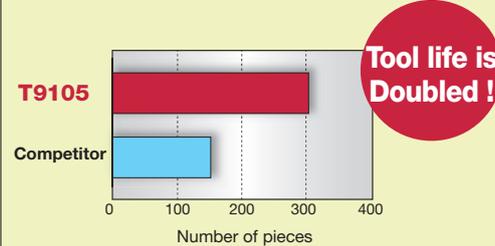
Application	Chipbreaker Appearance (Cross section)	$f - a_p$	Cat. No	Stocked grades				Dimensions (mm)			
				Coated				I.C.dia $\phi d$	Thick- ness s	Hole dia $\phi d1$	Corner radius $r\epsilon$
				T9105	T9115	T9125	T9135				
Finishing to medium cutting	<b>RS</b> 		<b>RCMT10T3M0-RS</b>		●	●		10.0	3.97	4.4	-
			<b>RCMT1204M0-RS</b>		●	●		12.0	4.76	4.4	-
			<b>*RCMT1606M0-RS</b>		●	●		16.0	6.35	5.5	-
			<b>RCMT2006M0-RS</b>				●	20	6.35	6.5	-
			<b>RCMT2507M0-RS</b>				●	25	7.94	7.6	-
Heavy cutting	<b>61</b> 		<b>RCMT0502M0-61</b>		●	●		5.0	2.38	2.5	-
			<b>*RCMT0602M0-61</b>		●	●		6.0	2.38	2.8	-
			<b>RCMT0803M0-61</b>		●	●		8.0	3.18	3.4	-
	<b>61</b> 		<b>RCMM1003M0-61</b>		●	●		10.0	3.18	3.6	-
			<b>RCMM1204M0-61</b>		●	●		12.0	4.76	4.2	-
			<b>*RCMM1606M0-61</b>		●	●		16.0	6.35	5.2	-
			<b>RCMM2006M0-61</b>		●	●		20.0	6.35	6.5	-
		<b>RCMM2507M0-61</b>		●	●		25.0	7.94	7.2	-	

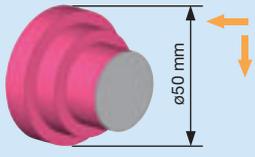
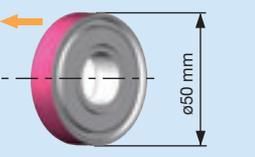
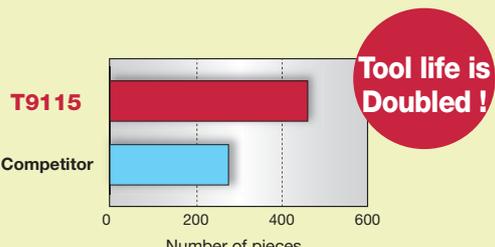
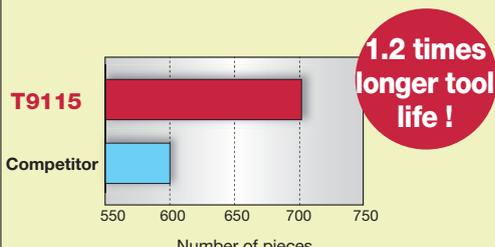
\*Note: Chipbreaker cross sections are of \* marked insert.


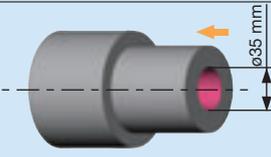
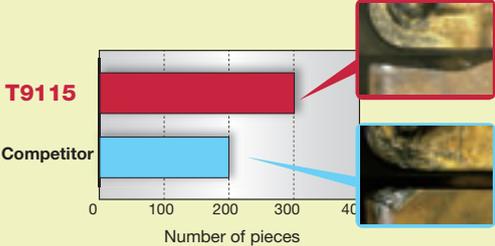
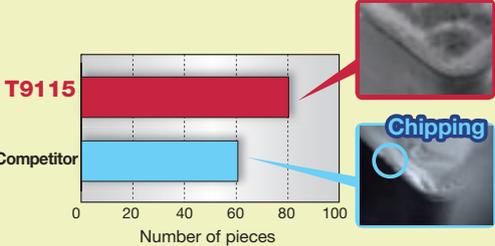
● : Stocked items


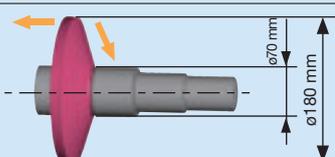
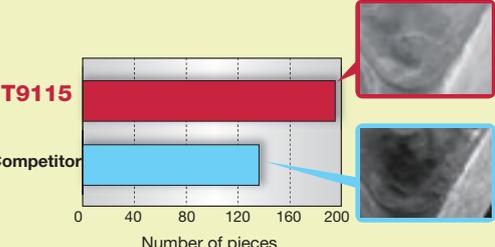
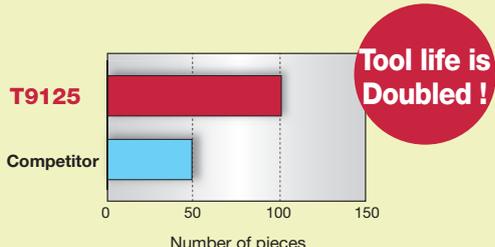



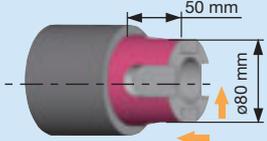
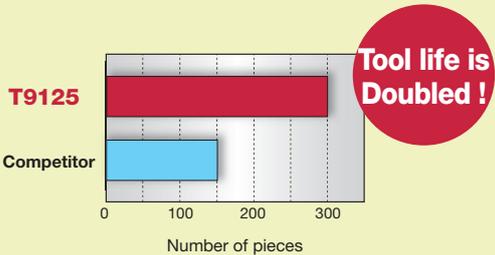
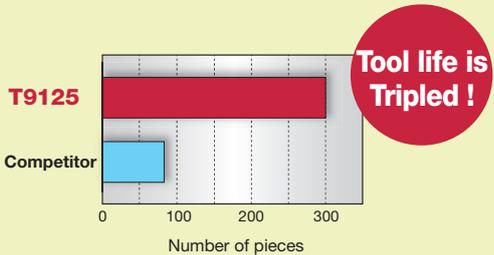
## Practical examples

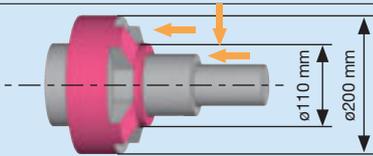

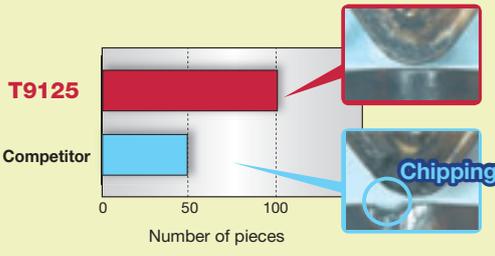
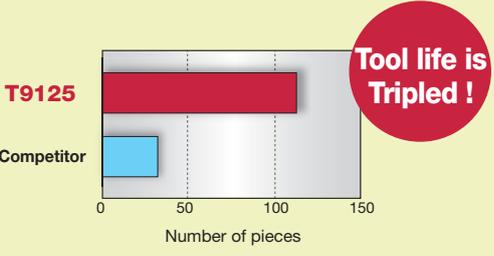
Workpiece type		Automotive parts	Shaft parts
Insert		WNMG080412-TM	DNMG150412-TM
Grade		T9105	T9105
Work material		S45C / C45	S45C / C45
			
Cutting conditions	Cutting speed: $V_c$ (m/min)	180	200
	Feed: $f$ (mm/rev)	0.2	0.3
	Depth of cut: $a_p$ (mm)	2.0	1.5
	Machining	External turning (continuous)	External profiling (continuous)
	Coolant	Wet	Wet
Results			
		<p><b>Tool life is doubled. T9105 grade offers long and stable tool life due to high wear and chipping resistance.</b></p>	<p><b>T9105 at least doubles the tool life. This grade offers extended tool life with improved wear and chipping resistance.</b></p>

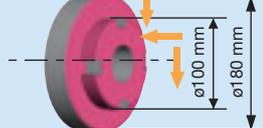
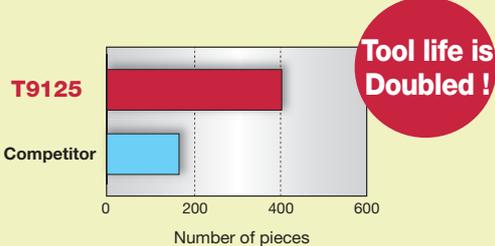
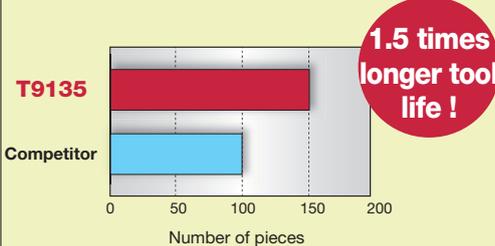
Workpiece type		Automotive parts	Bearing parts
Insert		WNMG080412-TM	TNMG160408-TSF
Grade		T9115	T9115
Work material		S45C / C45	SUJ2 / 100Cr6
			
Cutting conditions	Cutting speed: $V_c$ (m/min)	240	180
	Feed: $f$ (mm/rev)	0.4	0.1
	Depth of cut: $a_p$ (mm)	1.4	0.7
	Machining	External and face turning (continuous)	External turning (continuous)
	Coolant	Wet	Wet
Results			
		<p><b>T9115 demonstrates remarkable chipping resistance that delivers stable and extended tool life without any sudden fractures. This tool life is also applicable to intermittent machining.</b></p>	<p><b>With improved wear and chipping resistance the T9115 offers stable and long life when finish machining.</b></p>


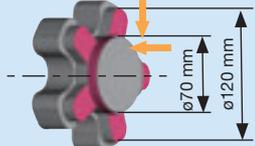
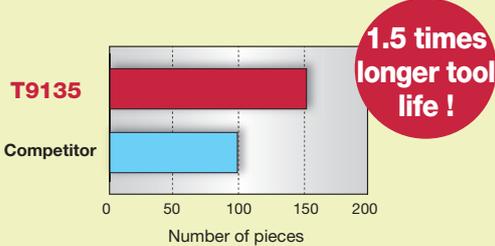
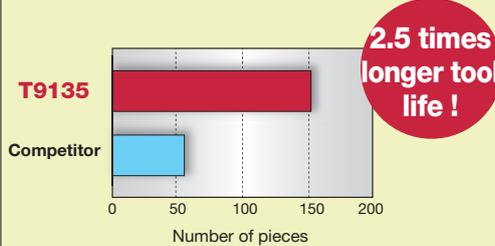
Workpiece type		Bearing parts	Machine parts
Insert		<b>WNMG080408-ZM</b>	<b>CNMG120408-TM</b>
Grade		<b>T9115</b>	<b>T9115</b>
Work material		<b>SCM415 / 18CrMo4</b>	<b>S45C / C45</b>
			
Cutting conditions	Cutting speed: $V_c$ (m/min)	180	180
	Feed: $f$ (mm/rev)	0.2	0.3
	Depth of cut: $a_p$ (mm)	1.0	3.0
	Machining	External and face turning (continuous)	Internal turning (roughing / continuous)
	Coolant	Wet	Wet
Results		 <p><b>T9115</b> has 1.5 times longer tool life. The T9115 offers extremely stable tool life with exceptional fracture resistance that prevents any sudden tool breakages.</p>	 <p>Increases productivity by 30%. Machine down-time is reduced.</p>

Workpiece type		Automotive parts	Shaft parts
Insert		<b>DNMG150408-TM</b>	<b>VNMG160412-TM</b>
Grade		<b>T9115</b>	<b>T9125</b>
Work material		<b>S45C / C45</b>	<b>SCM415 / 18CrMo4</b>
			
Cutting conditions	Cutting speed: $V_c$ (m/min)	200	280
	Feed: $f$ (mm/rev)	0.25	0.35
	Depth of cut: $a_p$ (mm)	2.0	1.3
	Machining	External profiling (continuous)	External and face turning (continuous)
	Coolant	Wet	Wet
Results		 <p>The T9115 machined 190 pieces continuously. The competitor insert machined between 100 to 150 pieces, proving very unstable with frequent fractures. Tool life is extended 1.5 times with Tungaloy insert.</p>	 <p>Tool life has been doubled. The T9125 grade prevents the occurrence of chipping and fracture.</p>

Workpiece type		Automotive parts	Machine parts
Insert		CNMG120408-TM	WNMG080408
Grade		T9125	T9125
Work material		SCr420 / 20Cr4	S20C / C22E
			
Cutting conditions	Cutting speed: $V_c$ (m/min)	220	150
	Feed: $f$ (mm/rev)	0.2	0.30 (External) 0.25 (Facing)
	Depth of cut: $a_p$ (mm)	1.0	1.0
	Machining	Face turning (interrupted)	External turning (interrupted)
	Coolant	Dry	Wet
Results		 <p><b>Tool life is Doubled !</b></p> <p>Tool life has been doubled. There was no chipping on the edge and tool life proved very stable.</p>	 <p><b>Tool life is Tripled !</b></p> <p>The T9125 produced 300 pieces. The tool life of the competitor's grade was 80 to 100 pieces, this variation proved unstable.</p>

Workpiece type		Hub parts	Cylinder parts
Insert		CNMG120412-TM	CNMG120408-NM
Grade		T9125	T9125
Work material		S53C / C53	SCM440 / 42CrMo4
			
Cutting conditions	Cutting speed: $V_c$ (m/min)	200	150
	Feed: $f$ (mm/rev)	0.3	0.3
	Depth of cut: $a_p$ (mm)	1.5	0.3
	Machining	External and face turning (interrupted)	External and face turning (Interrupted)
	Coolant	Wet	Wet
Results		 <p><b>Tool life is Doubled !</b></p> <p>Tool life has been doubled. T9125 grade offers stable and longer life in heavy interrupted cutting.</p>	 <p><b>Tool life is Tripled !</b></p> <p>T9125 has 3.0 times longer tool life. T9125 demonstrates excellent chipping resistance. Applicable for medium to heavy cutting.</p>

Workpiece type		Automotive parts	Gear parts
Insert		<b>CNMG120412-TM</b>	<b>WNMG080412-TM</b>
Grade		<b>T9125</b>	<b>T9135</b>
Work material		<b>SCM440 / 42CrMo4</b>	<b>SCM420 / 18CrMo4</b>
			
Cutting conditions	Cutting speed: $V_c$ (m/min)	150	200
	Feed: $f$ (mm/rev)	0.3	0.3
	Depth of cut: $a_p$ (mm)	1.5	1.5
	Machining	External and face turning (Interrupted)	External and face turning (Interrupted)
	Coolant	Wet	Wet
Results		 <p><b>T9125</b></p> <p>Competitor</p> <p>Number of pieces</p> <p><b>Tool life is Doubled !</b></p> <p>Even when conducting interrupted machining, the T9125 provides exceptional stability credit to its high impact resistance.</p>	 <p><b>T9135</b></p> <p>Competitor</p> <p>Number of pieces</p> <p><b>1.5 times longer tool life !</b></p> <p>Tool life of T9135 is significantly improved due to reductions in chipping and unexpected fracture.</p>

Workpiece type		Axle parts	Axle parts
Insert		<b>CNMG120412-TM</b>	<b>CNMG120416-TH</b>
Grade		<b>T9135</b>	<b>T9135</b>
Work material		<b>S55C / C55</b>	<b>S55C / C55</b>
			
Cutting conditions	Cutting speed: $V_c$ (m/min)	180	150
	Feed: $f$ (mm/rev)	0.3	0.35
	Depth of cut: $a_p$ (mm)	1.3	1.0
	Machining	Face turning (Interrupted)	External and face turning (Interrupted)
	Coolant	Wet	Wet
Results		 <p><b>T9135</b></p> <p>Competitor</p> <p>Number of pieces</p> <p><b>1.5 times longer tool life !</b></p> <p>T9135 has 1.5 times longer tool life. It reduces chipping on the cutting edge when interrupted cutting. The T9135 also provides good surface finishes and stable tool life.</p>	 <p><b>T9135</b></p> <p>Competitor</p> <p>Number of pieces</p> <p><b>2.5 times longer tool life !</b></p> <p>T9135 has 2.5 times longer tool life. Sudden fractures on the cutting edge when interrupted cutting are drastically reduced to deliver significantly longer tool life.</p>



## **Tungaloy Corporation (Head office)**

11-1 Yoshima-Kogyodanchi  
Iwaki-city, Fukushima, 970-1144 Japan  
Phone: +81-246-36-8501  
Fax: +81-246-36-8542  
www.tungaloy.co.jp

## **Tungaloy America, Inc.**

3726 N Ventura Drive  
Arlington Heights, IL 60004, U.S.A.  
Phone: +1-888-554-8394  
Fax: +1-888-554-8392  
www.tungaloyamerica.com

## **Tungaloy Canada**

432 Elgin St. Unit 3  
Brantford, Ontario N3S 7P7, Canada  
Phone: +1-519-758-5779  
Fax: +1-519-758-5791  
www.tungaloy.co.jp/ca

## **Tungaloy de Mexico S.A.**

C Los Arellano 113,  
Parque Industrial Siglo XXI  
Aguascalientes, AGS, Mexico 20290  
Phone: +52-449-929-5410  
Fax: +52-449-929-5411  
www.tungaloy.co.jp/mx

## **Tungaloy do Brasil Comércio de Ferramentas de Corte Ltda.**

Rua dos Sabias N.104  
13280-000 Vinhedo, São Paulo, Brazil  
Phone: +55-19-38262757  
Fax: +55-19-38262757  
www.tungaloy.co.jp/br

## **Tungaloy Germany GmbH**

An der Alten Ziegelei 1  
D-40789 Monheim, Germany  
Phone: +49-2173-90420-0  
Fax: +49-2173-90420-19  
www.tungaloy.de

## **Tungaloy France S.A.S.**

ZA Courtaboeuf - Le Rio  
1 rue de la Terre de feu  
F-91952 Courtaboeuf Cedex, France  
Phone: +33-1-6486-4300  
Fax: +33-1-6907-7817  
www.tungaloy.fr

## **Tungaloy Italia S.r.l.**

Via E. Andolfato 10  
I-20126 Milano, Italy  
Phone: +39-02-252012-1  
Fax: +39-02-252012-65  
www.tungaloy.it

## **Tungaloy Czech s.r.o.**

Turanka 115  
CZ-627 00 Brno, Czech Republic  
Phone: +420-532 123 391  
Fax: +420-532 123 392  
www.tungaloy.cz

## **Tungaloy Ibérica S.L.**

C/Miquel Servet, 43B, Nau 7  
Pol. Ind. Bufalvent  
ES-08243 Manresa (BCN), Spain  
Phone: +34 93 113 1360  
Fax: +34 93 876 2798  
www.tungaloy.es

## **Tungaloy Scandinavia AB**

S:t Lars Väg 42A  
SE-22270 Lund, Sweden  
Phone: +46-462119200  
Fax: +46-462119207  
www.tungaloy.se

## **Tungaloy Rus, LLC**

36-D Harkovsky Lane  
308009 Belgorod, Russia  
Phone: +7 4722 24 00 07  
Fax: +7 4722 24 00 08  
www.tungaloy.co.jp/ru

## **Tungaloy Polska Sp. z o.o.**

ul. Genewska 24  
03-963 Warszawa, Poland  
Phone: +48-22-617-0890  
Fax: +48-22-617-0890  
www.tungaloy.co.jp/pl

## **Tungaloy U.K. Ltd**

The Technology Centre,  
Wolverhampton Science Park  
Glaisher Drive, Wolverhampton  
West Midlands WV10 9RU, UK  
Phone: +44 121 309 0163  
Fax: +44 121 270 9694  
www.tungaloy.co.uk  
salesinfo@tungaloyuk.co.uk

## **Tungaloy Hungary Kft**

Erzsébet királyné útja 125  
H-1142 Budapest, Hungary  
Phone: +36 1 781-6846  
Fax: +36 1 781-6866  
www.tungaloy.co.jp/hu  
info@tungaloytools.hu

## **Tungaloy Turkey**

Dudullu Organize Sanayi Bolgesi DES  
Sanayi Sitesi 1 Cadde Ticaret  
Merkezi No.3/7  
34779 Umraniye Istanbul, TURKEY  
Phone: +90 216 540 04 67  
Fax: +90 216 540 04 87  
www.tungaloy.co.jp/tr  
info@tungaloy.com.tr

## **Tungaloy Benelux b.v.**

Tjalk 70  
NL-2411 NZ Bodegraven, Netherlands  
Phone: +31 172 630 420  
Fax: +31 172 630 429  
www.tungaloy-benelux.com

## **Tungaloy Croatia**

Malinska 8  
10430 Samobor, Croatia  
Phone: +385 1 3326 604  
Fax: +385 1 3327 683  
www.tungaloy.hr

## **Tungaloy Cutting Tool (Shanghai) Co.,Ltd.**

Rm No 401 No.88 Zhabei  
Jiangchang No.3 Rd  
Shanghai 200436, China  
Phone: +86-21-3632-1880  
Fax: +86-21-3621-1918  
www.tungaloy.co.jp/tcts

## **Tungaloy Cutting Tool (Thailand) Co.,Ltd.**

11th Floor, Sorachai Bldg. 23/7  
Soi Sukhumvit 63  
Klongtonnue, Wattana  
Bangkok 10110, Thailand  
Phone: +66-2-714-3130  
Fax: +66-2-714-3134  
www.tungaloy.co.th

## **Tungaloy Singapore (Pte.), Ltd.**

31 Kaki Bukit Road 3, #05-19 TechLink  
Singapore 417818  
Phone: +65-6391-1833  
Fax: +65-6299-4557  
www.tungaloy.co.jp/tspl

## **Tungaloy India Pvt. Ltd.**

Unit#13, B wing, 8th floor  
Kamala Mills Compound  
Trade World, Lower Parel (West)  
Mumbai - 4000 13, India  
Phone: +91-22-6124-8804  
Fax: +91-22-6124-8899  
www.tungaloy.co.jp/in

## **Tungaloy Korea Co., Ltd**

#1312, Byucksan Digital Valley 5-cha  
Beotkkot-ro 244, Geumcheon-gu  
153-788 Seoul, Korea  
Phone: +82-2-2621-6161  
Fax: +82-2-6393-8952  
www.tungaloy.co.jp/kr

## **Tungaloy Malaysia Sdn Bhd**

50 K-2, Kelana Mall, Jalan SS6/14  
Kelana Jaya, 47301  
Petaling Jaya, Selangor Darul Ehsan  
Malaysia  
Phone: +603-7805-3222  
Fax: +603-7804-8563  
www.tungaloy.co.jp/my

## **Tungaloy Australia Pty Ltd**

Unit 308/33 Lexington Drive  
Bella Vista NSW 2153, Australia  
Phone: +612-9672-6844  
Fax: +612-9672-6866  
www.tungaloy.co.jp/au

## **PT. Tungaloy Indonesia**

Kompleks Grand Wisata Block AA-10  
No.3-5 Cibitung  
Bekasi 17510, Indonesia  
Phone: +62-21-8261-5808  
Fax: +62-21-8261-5809  
www.tungaloy.co.jp/id

Distributed by:



ISO 9001 certified  
QC00J0056  
Tungaloy Corporation

ISO 14001 certified  
EC97J1123  
Tungaloy Group  
Japan site and Asian  
production site  
26/11/1997



18/10/1996

Produced from Recycled paper

Oct. 2013 (TJ)